



KENWORTH NORTHWEST

10/7/2020

City of Mukilteo, (WA)
Public Works Superintendent
11930 Cyrus Way
Mukilteo, WA 98275

Attn: Matt Nienhuis

Re: Quote 631719-W5L2S2

I am pleased to present to you the following quote for your consideration:

This is a quote based on Sourcewell (formerly NJPA) contract, # 060920-KTC

One (1) New 2021 Kenworth T880—chassis only as quoted.

Lead time is currently 12/15/2020

Build rate and lead time subject to change in accordance with the receipt of purchase order number.

Price is based on attached specifications and is subject to change should revision to the specifications be required.

Payment Terms: Net 15 Days

	PX9-370hp
List Price (ea):	\$266,283.00
Sourcewell Discount:	.534
Subtotal:	\$142,195.00
PTO Upfit (ea):	N/A
Federal Excise Tax:	N/A
Estimated Sales Tax:	\$14,,195.00
TOTAL (ea):	\$ 156,841.00
Quantity Requested:	1
GRAND TOTAL:	\$156,841.00

SeaTac, WA 98198-0967
Aberdeen, WA 98520-4429
Anchorage, AK 99501-3117
Yakima, WA 98907-1788
Marysville, WA 98270-0211
Fairbanks, AK 99701-7206

P.O. Box 98967, 20220 International Blvd South
120 South Maple
2838 Porcupine Drive
P.O. Box 1788, 907 South 18th Street
P.O. Box 211, 11300 31st Drive N.E.
2262 Van Horn Road

(206) 433-5911 Fax (206) 878-7676
(360) 533-3356 Fax (360) 532-1835
(907) 279-0602 Fax (907) 258 6639
(509) 452-8564 Fax (509) 457-5172
(360) 658-7049 Fax (509) 659-3280
(907) 455-9900 Fax (907) 479-8295



**KENWORTH
NORTHWEST**

X _____
Customer Acceptance

X _____
Papé Kenworth Northwest

Jim Skraba
Pape KWNW
Territory Sales Mgr
20220 International Blvd
SeaTac, WA 98198
(206) 730-3766

SeaTac, WA 98198-0967
Aberdeen, WA 98520-4429
Anchorage, AK 99501-3117
Yakima, WA 98907-1788
Marysville, WA 98270-0211
Fairbanks, AK 99701-7206

P.O. Box 98967, 20220 International Blvd South
120 South Maple
2838 Porcupine Drive
P.O. Box 1788, 907 South 18th Street
P.O. Box 211, 11300 31st Drive N.E.
2262 Van Horn Road

(206) 433-5911	Fax (206) 878-7676
(360) 533-3356	Fax (360) 532-1835
(907) 279-0602	Fax (907) 258 6639
(509) 452-8564	Fax (509) 457-5172
(360) 658-7049	Fax (509) 659-3280
(907) 455-9900	Fax (907) 479-8295



KENWORTH NORTHWEST

10/7/2020

City of Mukilteo, (WA)
Public Works Superintendent
11930 Cyrus Way
Mukilteo, WA 98275

Attn: Matt Nienhuis

Re: Quote 631719-W5L2S2

I am pleased to present to you the following quote for your consideration:

This is a quote based on Sourcewell (formerly NJPA) contract, # 060920-KTC
One (1) New 2021 Kenworth T880—chassis only as quoted.

Lead time is currently 12/15/2020

Build rate and lead time subject to change in accordance with the receipt of purchase order number.

Price is based on attached specifications and is subject to change should revision to the specifications be required.

Payment Terms: Net 15 Days

	PX9-370hp
List Price (ea):	\$258,128.00
Sourcewell Discount:	.534
Subtotal:	\$137,841.00
PTO Upfit (ea):	N/A
Federal Excise Tax:	N/A
Estimated Sales Tax:	\$14,198.00
TOTAL (ea):	\$ 152,039.00
Quantity Requested:	1
GRAND TOTAL:	\$152,039.00

SeaTac, WA 98198-0967
Aberdeen, WA 98520-4429
Anchorage, AK 99501-3117
Yakima, WA 98907-1788
Marysville, WA 98270-0211
Fairbanks, AK 99701-7206

P.O. Box 98967, 20220 International Blvd South
120 South Maple
2838 Porcupine Drive
P.O. Box 1788, 907 South 18th Street
P.O. Box 211, 11300 31st Drive N.E.
2262 Van Horn Road

(206) 433-5911 Fax (206) 878-7676
(360) 533-3356 Fax (360) 532-1835
(907) 279-0602 Fax (907) 258 6639
(509) 452-8564 Fax (509) 457-5172
(360) 658-7049 Fax (509) 659-3280
(907) 455-9900 Fax (907) 479-8295



**KENWORTH
NORTHWEST**

X _____
Customer Acceptance

X _____
Papé Kenworth Northwest


Jim Skraba
Pape KWNW
Territory Sales Mgr
20220 International Blvd
SeaTac, WA 98198
(206) 730-3766

SeaTac, WA 98198-0967
Aberdeen, WA 98520-4429
Anchorage, AK 99501-3117
Yakima, WA 98907-1788
Marysville, WA 98270-0211
Fairbanks, AK 99701-7206

P.O. Box 98967, 20220 International Blvd South
120 South Maple
2838 Porcupine Drive
P.O. Box 1788, 907 South 18th Street
P.O. Box 211, 11300 31st Drive N.E.
2262 Van Horn Road

(206) 433-5911	Fax (206) 878-7676
(360) 533-3356	Fax (360) 532-1835
(907) 279-0602	Fax (907) 258 6639
(509) 452-8564	Fax (509) 457-5172
(360) 658-7049	Fax (509) 659-3280
(907) 455-9900	Fax (907) 479-8295

HORIZONTAL DIMENSIONS

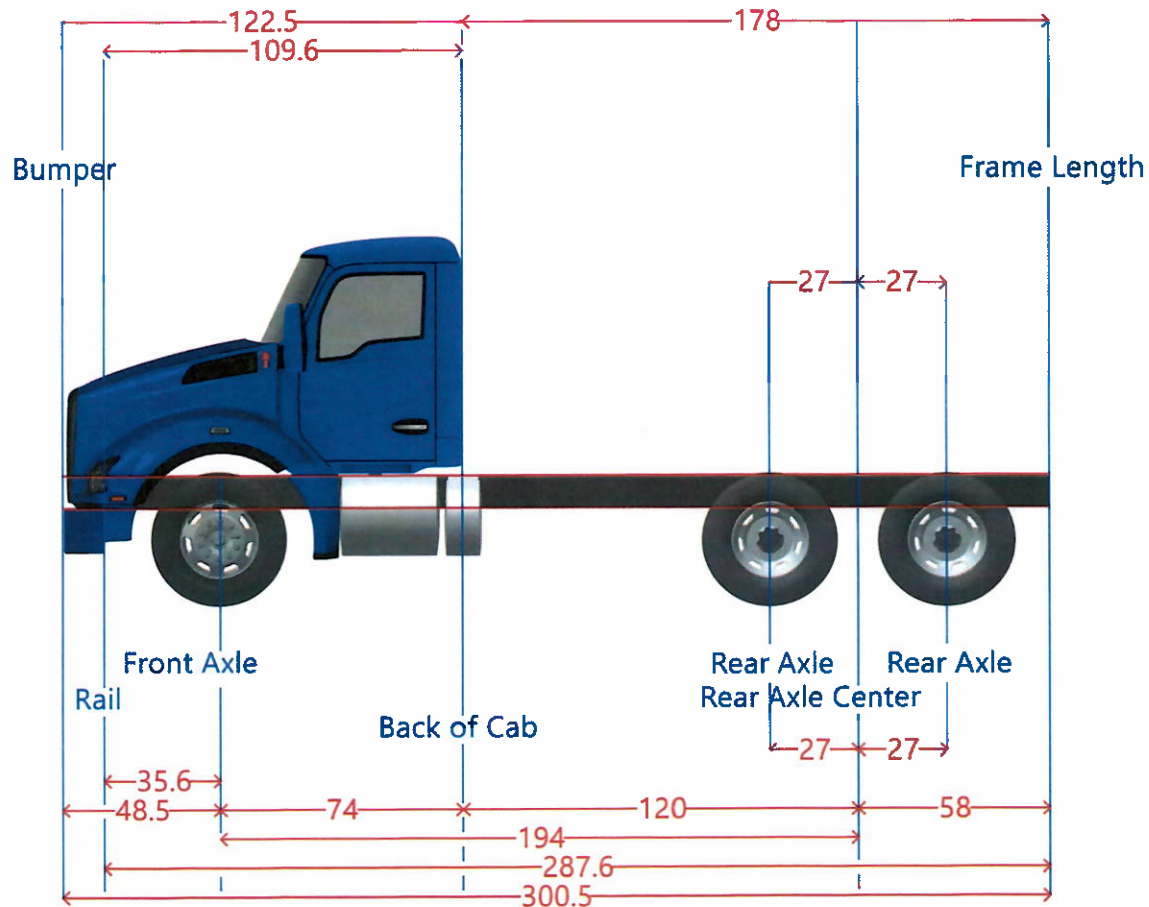

Dimension	Measurement	Start	End
Axle Spacing	54	167	221
Bumper to Back of Cab	122.5	-48.5	74
Bumper to Front Axle	48.5	-48.5	0
Bumper to Front Frame	12.9	-48.5	-35.6
Cab to End of Frame	178.0	74	252
Cab to Rear Axle	120.0	74	194

Frame Length	287.6	-35.6	252
Front Axle to Back of Cab	74.0	0	74
Front of Frame to Axle	35.6	-35.6	0
Load Space	178.0	74	252
Overall Length	300.5	-48.5	252
Overhang	58.0	194	252
Pusher Offset #1	27.0	167	194
Pusher Offset #2	27.0	167	194
Pusher Offset #3	27.0	167	194
Tag Offset	27.0	194	221
Wheelbase	194	0	194



PAPÉ KENWORTH NORTHWEST – SEATAC (P410)
20220 INTERNATIONAL BLVD.
SEATAC, Washington 98198

City of Mukilteo
4480 Chenault Beach Rd
Mukilteo, Washington 98275
United States of America

James Skraba
Cell Phone: (206) 651-2005
Office Phone: 206-730-3766
Email: jskraba@papekwnw.com

Matt Nienhuis
Cell Phone: 425-315-2613
Email: mnienhuis@mukilteowa.gov

Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	16000
Type:	FULL TRUCK	Rr Axle Load (lbs):	46000
Description 1:	City of Mukilteo	G.C.W. (lbs):	105500
Description 2:	T880 4-AX DUMP X15 ALL		
Application		Road Conditions:	
Intended Serv.:	Local pickup & delivery: Vehicles which	Class A (Highway)	88
Commodity:	Gravel/crushed rock/sand.	Class B (Hwy/Mtn)	10
Body		Class C (Off-Hwy)	2
Type:	End dump.	Class D (Off-Road)	0
Length (ft):	16	Maximum Grade:	6
Height (ft):	13.5	Wheelbase (in):	194
Max Laden Weight (lbs):	4000	Overhang (in):	58
Trailer		Fr Axle to BOC (in):	74
No. of Trailer Axles:	0	Cab to Axle (in):	120
Type:		Cab to EOF (in):	178
Length (ft):	0	Overall Comb. Length (in):	300.5
Height (ft):	0	Special Req.	
Kingpin Inset (in):	0	U.S. Domestic registry, 50-state.	
Corner Radius (in):	0		
Restrictions			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

Sales Code	Std/ Opt	Description	\$ List	Weight
Model				
0000810	S	T880 Series Conventional	198,052	14,844
0070060	S	T880	0	0
0080066	O	CARB Idle Emissions Reduction - MX	100	0
0090000	S	Non-Sleeper w/rear axle capacity less than 59K.	0	0
Engine & Equipment				
0700701	O	PACCAR MX-13 510 2017 510@1600 1850@1000 with engine brake N08200 N052 650...IDLE TARGET N09020 N015 NO....ENABLE MX RETARDER IN NEUTRA N08020 N718 155...LRSL SPEED LIMIT N08030 N711 64....MAX PEDAL SPEED N09030 N874 0.....ENG BRK DELAY TIME N09040 N871 2.....DSC TGT VEH SPD LMT OFFSET N09050 N870 4.....DSL TGT VEH SPD LIMIT OFFSET N09110 N506 10....CC MIN ENABLE SPD N09130 N890 MT....MULTI TORQUE IN CC N09120 N509 OFF...DYNAMIC CC ENABLE N09220 N690 5.....EIST STANDSTILL IDLE TIME N09230 N689 5.....EIST PARKED MAX IDLE TIME N09240 N692 YES...EIST ENG LOAD RESET N09250 N693 NO....EIST ENG LOAD OVERRIDE N09260 N688 5.....EIST PTO MAX IDLE TIME N09270 N702 YES...EIST OVERRIDE IN PTO MODE N09280 N687 40....EIST AMB AIR TEMP OVERRIDE L N09290 N686 80....EIST AMB AIR TEMP OVERRIDE H N09300 N684 30....EIST CLNT TEMP OVERRIDE LO N09310 N699 YES...EIST ACCEL POSITION RESET N09320 N701 YES...EIST CLUTCH PEDAL RESET N09330 N700 YES...EIST FOOT BRK RESET N09340 N681 YES...EIST PARK BRK RESET ENABLE N09350 N726 1900..FIC MAX ENG SPEED N09400 N545 YES...CAB: ACCEL ACTIVE IN CAB PTO N09410 N578 YES...PTO REM PEDAL ENABLE N09420 N523 6.....CAB: MAX VEH SPD N09430 N520 2000..CAB: MAX ENG SPD - SW CNTRL N09440 N519 2000..CAB: MAX ENG SPD-ACCEL CNTRL N09100 N504 64....CC MAX TARGET SPD N09450 N603 650...CAB: MIN ENG SPD N09510 N535 800...CAB: DEDICATED PRESET "-" N09520 N536 900...CAB: DEDICATED PRESET "+" N09530 N553 2000..REM: MAX ENG SPD-SW/TSC1 CNT N09540 N552 2000..REM: MAX ENG SPD-ACCEL CNTRL N09550 N602 650...REM: MIN ENG SPD N09610 N568 800...REM: DEDICATED PRESET "-" N09620 N569 900...REM: DEDICATED PRESET "+"	1,732	0

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
		N09640 N538 750...CAB: CUSTOM PRESET 1		
		N09650 N540 850...CAB: CUSTOM PRESET 2		
		N09660 N542 950...CAB: CUSTOM PRESET 3		
		N09720 N637 3.....MIN SPD FOR DR SHIFT AID		
		N09730 N638 1.....LOWEST TRANS GEAR NUMBER		
		N09740 N639 10.....HIGHEST TRANS GEAR NUMBER		
		N09760 N618 5.....DRIVER REWARD VEH SPD BONUS		
		N09770 N621 -5.....DRIVER REWARD VEH SPD PENALT		
		N09670 N571 750...CAB/REM: CUSTOM PRESET 1		
		N09680 N573 850...CAB/REM: CUSTOM PRESET 2		
		N09690 N575 950...CAB/REM: CUSTOM PRESET 3		
		N09360 N071 ON....FIC ENABLE/DISABLE		
		N08000 N717 0.....VSL EXPIRATION DISTANCE		
		N09200 N695 0.....EIST EXPIRATION DISTANCE		
		N09460 N549 ON A..CAB: Park Brake Interlock		
		N09470 N546 ON A..CAB: CLUTCH INTLK		
		N09480 N548 ON A..CAB: NEUTRAL INTLK		
		N09490 N550 ON A..CAB: SER BRK INTLK: PRESS =		
		N09500 N543 DEDIC.CAB: PRESET +/- SW TYPE		
		N09560 N580 ON AD.REM: CLUTCH INTLK		
		N09570 N582 ON AD.REM: NEUTRAL INTLK		
		N09580 N584 ON AD.REM:Ser Brk Intlk:Press=No P		
		N09600 N576REM: PRESET +/- SW TYPE		
		N09630 N544 TRQ...CAB: ACCEL PEDAL TYPE IN PTO		
		N09800 N541 CNCL..CAB: CUSTOM PRESET 3 FUNC		
		N09750 N632 NONE..OFFSET MODE		
		N09780 N537 CNCL..CAB: CUSTOM PRESET 1 FUNC		
		N09790 N539 CNCL..CAB: CUSTOM PRESET 2 FUNC		
		N09810 N570 CNCL..CAB/REM: CUSTOM PRESET1 FUNC		
		N09820 N572 CNCL..CAB/REM: CUSTOM PRESET2 FUNC		
		N09830 N574CAB/REM: CUSTOM PRESET3 FUNC		
		N09840 N547 OFF...CAB: CUSTOMER INTLK		
		N09700 N581 OFF...REM: CUSTOMER INTLK		
1000151	S	PremierSpec	0	0
1000204	O	Engine monitoring protection -Derate- PACCAR MX engine parameter.	0	0
1000243	O	Gearing Analysis: Performance power before economy results.	0	0
1000256	S	Customer's Typical Operating Spd: 64 MPH	0	0
1000282	O	MX Retarder State Cruise Control On Manual Mode Selecting this code will program the engine controller to make manual mode available when cruise control is on, but not set, and the engine brake switch is on. Manual mode means the engine retarder activates whenever the throttle pedal is not depressed. 2013+	0	0
1000684	O	Effective VSL Setting NA	0	0
1000857	S	Engine Idle Shutdown Timer Enabled	0	0

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
1006003	S	Air Compressor: WABCO 25.9 CFM PACCAR MX 2017 440cc Air Compressor	0	0
1051200	S	Air Cleaner: composite firewall mounted PACCAR or Cummins engines	0	0
1099080	O	Pre-cleaner mounted in the hood plenum	331	0
1105211	O	Fan Hub: Horton On/Off for PACCAR MX	0	0
1123555	S	Cooling module: 1330 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0	0
1160208	O	Radiator bug screen mounted between hood & grille.	121	2
1247166	S	Exhaust: 2017 EPA RH Under DPF/SCR w/ RH side of cab vertical tailpipe w/ daycabs, extended daycabs, or modular sleepers.	0	0
1290124	O	Tailpipe: 5 in. single 24 in. 45 degree curved.	-69	-3
1321110	O	Fuel Filter:PACCAR Extended Service Interval Fuel/Water Separator, 2017 and Later Emissions	31	0
1321205	S	Run Aid:Fuel Heat *For Fuel Filter	0	0
1321300	S	Start Aid:None *For Fuel Filter	0	0
1504005	O	Immersion block heater 120V 1500W w/plug under door on C500, T660, T800 & W900.	117	2
1816260	S	Alternator: PACCAR 160 amp, brush type	0	0
1821275	O	Batteries: 3 AGM GP31 THR (925) 2775 CCA. For T680 & T880 in cab battery box only.	470	0
1836102	S	PACCAR Premium 12V Starter with PACCAR MX Engines PACCAR 12 volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1840065	S	12V low voltage disconnect for starter battery protection.	0	0
1900996	O	Jump start terminals under hood.	248	12
1901017	S	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	87	0

Transmission & Clutch

2016158	O	Transmission: Allison 4500RDS 6-speed w/o retarder, w/PTO provision. 5th generation. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	23,875	478
---------	---	---	--------	-----

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
2406453	O	Driveline: 2 Dana SPL250XL 1 centerbearing requires 3500057 interaxle driveline. Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life, quick disconnect end caps.	991	95
2410018	O	Torque converter included w/Allison Transmission.	0	0
2410126	U	engine brake preselect 5th rang <i>Narr need 5th range when activated engine brake</i>	0	0
2410154	O	Allison lever control, center console mounted. The lever shifter is for use with Allison Transmissions and is located in the dash cup holder assembly.	387	0
2410204	O	Delete Allison Fuel Sense	0	0
2410571	U	TORQUE CONVERTER:TC571 F/4000 SERIES	0	0
2422194	U	Chelsea PTO 892HAFJWXY <i>Narr NEED pto for application</i>	8,608	123
2429375	O	Factory installed transmission PTO in the LH Mounted position (8 o'clock) for Allison 3000 & 4000 transmissions. Create NPO for specific PTOs to be installed by the factory.	0	0
Front Axle & Equipment				
2506181	O	Dana Spicer D2000 Front Axle rated 20K standard track.	2,459	120
2607002	S	Front Brakes: 14,601-22K Bendix air disc brakes.	435	10
2690024	S	Splined rotor for front air disc brakes for use with aluminum hubs.	0	0
2701319	S	Front Hubs Aluminum hub pilot 20,000 lbs. 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle.	646	16
2741970	S	ConMet PreSet Plus Hub package; front axle.	0	0
2750001	S	Hubcap: front vented.	0	0
2769000	S	Slack Adjusters included w/ front axle or brake. Also use w/ disc brakes.	0	0
2866020	S	Front Springs: Taperleaf 20K w/ shock absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. Not available on W900L. W900B use 2866021.	1,215	241
2893881	O	Single power steering gear: 16K TRW TAS85 W900B/W990 available, but not available W900S, W900L or T3.	428	18
2899336	S	Power Steering Cooler:Radiator Mounted Air-to-Oil	356	11
2900616	O	Threaded Bushings for taperleaf spring 16K, 18/20K, 22K, 40K replacing rubber.	89	0

Rear Axle & Equipment

Sales Code	Std/ Opt	Description	\$ List	Weight
3142171	O	Dual Meritor RT46-164PEH rear axle rated at 46K w/ heavy wall housing. Tandem rear axles.	3,773	641
3200456	O	Rear Axle Ratio - 4.56.	0	0
3306001	O	Dual rear Bendix air disc brakes for dual rear axles to 46K capacity.	66	40
3392604	O	Splined rotor for dual rear air disc brake for use with aluminum hubs.	3,934	-208
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0	0
3465900	O	Rear slack adjusters included w/ axle or air disc brakes.	0	0
3485002	O	Spring brakes included w/ dual rear air disc brakes.	0	0
3495227	O	Bendix 6S/6M anti-lock brake system.	-2,563	5
3500057	O	Interaxle driveline 1 Dana SPL170XL	0	-4
3742970	O	Tandem Hendrickson HAULMAAX (HMX) 460 46K. 54 in. axle spacing. With shocks, track rods, rubber bolster bushings and 16.5 in. saddle height. Unladen Height: 10.6 in. Laden Height: 9.5 in.	658	313
3830145	O	Delete standard heavy-duty air springs for rear suspension.	0	0
Tires & Wheels				
4077406	O	Front tires: Bridgestone M864 385/65R22.5 18PR All position. On/Off highway. Wide-base tire.	835	122
4278133	O	Rear tires: Bridgestone L320 11R24.5 16PR. 44.4 in. diameter, drive. 20.7 in. SLR. Code is priced per pair of tires.	2,384	328
4900008	O	Rear Tire Quantity: 8	0	0
5045218	O	Front Wheel: Alcoa 82462 22.5x12.25 aluminum, with Lvl One [TM] finish, hub-pilot mount. 11000lb. maximum rating. 5.80 in. offset. Air disc brake compatible.	884	-3
5245275	O	Rear Wheel: Alcoa 98U63 24.5X8.25 AL Ultra ONE Wheel.	1,924	-136
5900008	O	Rear Wheel/Rim Quantity: 8	0	0
Frame & Equipment				
6056400	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 285in. to 336 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will	519	254

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
		advise the dealer of the appropriate material specification for a substitute rail.		
6302461	O	Bumper: Tapered chrome steel channel. Requires a bumper setting code.	510	63
6319485	S	48.5 in. Bumper setting. Requires a bumper code.	0	0
6324025	O	Front tow hook: Center mounted, cast. Requires iron front drive brackets.	250	28
6390312	O	Brackets: Iron front spring drive. Included with front spring capacity of 16,000 lbs or greater; code not required.	94	47
6391201	O	Custom Frame Layout: one chassis CFL AD: MT INSIDE RH RAIL BOC	1,380	0
6397001	O	Huck bolts throughout frame, where possible.	302	0
6405000	O	In-cab steel battery box: under rider seat or in stand alone box. Requires appropriate AGM battery code, which varies by model, and appropriate rider seat code be selected prior to entering the workscreen. Includes 1 battery disconnect switch.	1,780	-9
6409906	O	In-Cab battery box location: Under rider seat.	0	0
6451090	S	T470,C5, T6, T8 non-polished DPF/SCR or CNG cover diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	0	0
6679859	O	Final end-of-frame cut-off dimension will be modified to 56 in. to 60 in.	0	0
6679995	O	Customer will install structural end-of-frame crossmember before vehicle is placed in service.	0	0
6721102	S	Rear mudflap arms: Betts B-25 standard-duty, straight. Includes B1732 mounting brackets as standard.	0	0
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0	0
6742009	S	Square end-of-frame w/o crossmember; non-towing.	0	0
Fuel Tanks & Equip				
7210060	O	Fuel Tank: 60 US gallon 24.5in. aluminum under replace. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck.	90	-15
7722011	S	Small round DEF tank. 11 gallons of usable volume. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0	0
7812238	U	One additional standard tank support for 1 fuel Narr OAR	131	18
7813002	U	Additional tank support location. LH under. Narr OAR	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
7831008	O	6 in. wide lower fuel tank step, for one 22 in. or 24.5 in. tank LH.	61	2
7840038	O	Polished cover for 1 DEF tank any size.	328	3
7889203	S	DEF to fuel fill ratio 2:1 or greater.	0	0
7889245	S	Anti-siphon device swaged in place. For any number of fuel tanks.	0	0
7889604	S	DEF tank location is LH.	0	0
7920060	O	Location: 60 gal fuel tank LH under cab	0	0
Cab & Equipment				
8025301	S	Cab: Stamped aluminum cab with panoramic curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0	0
8090604	O	Hood: T880 Standard Length With Mechanically Fastened Fenders. 122.6 inch BBC.	357	15
8098212	O	Bright Engine Air Intake Chrome Trimmed Engine Air Intake on Both Sides of Hood	105	0
8108002	O	Fine particulate filter for cabin air HVAC system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	124	0
8108011	S	Cab HVAC - Day Cab and 40in Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0	0
8190138	O	Shutoff Valves to Isolate Primary Heater Remote mounted on frame under cab.	56	0
8201013	S	Steering wheel: 18 in. 4-spoke.	0	0
8201051	O	Column Mtd Retarder Control, RH Side Use with Manual & Allison Transmissions Only.	0	0
8201200	S	Adjustable telescoping tilt steering column.	0	0
8203184	O	Switch & Wiring: For Customer-Installed Cab Panel Lights.	83	1
8203196	O	Dash Mounted Compact Trailer Brake Valve. Self Returning.	0	0
8205012	O	Off-highway dash switch: For ABS system. Includes indicator light.	54	0
8205038	O	Controls on dash for pintle hook.	48	2

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
		Includes piping.		
8205082	O	Controls on dash for trailer air suspension. Includes piping & indicator light. * Dash controls for trailer functions require that you add trailer connections to the order. * This trailer air suspension valve provides an air control. There is an option for trailer hotwire that provides an electric control wired to a dash switch. * Optional speed interlock available on T660/T680 models.	143	0
8205177	O	Dash Switch: 1st Allison-mntd PTO. Electric switch and wiring are factory-installed to control the 1st Allison Trans mounted PTO.	212	0
8208495	O	Two spare switches: Wired to power.	65	0
8209999	O	Spare Power Wiring For Customer Installed Devices Behind Dash Cluster. Includes 2 batt, 2 ign, 1 acc, 1 LVD at 20A each.	93	2
8220106	O	Gauge: Dash mounted air filter restriction gauge.	152	0
8221137	O	Gauge: Trailer air application gauge.	58	0
8221139	O	Gauge: Additional dash mounted air pressure gauge Includes piping to BOC/BOS.	43	0
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	40	0
8222712	O	Gauge: Fuel filter restriction gauge.	133	0
8222722	O	Gauge: Manifold Pressure Gauge. The NavPlus HD unit includes a virtual manifold pressure gauge.	31	0
8222794	O	Hour meter mounted in dash for PTO.	75	0
8224444	O	Dash mounted analog electronic clock.	75	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	213	0
8282007	S	Kenworth Driver Performance Center:5in Full Color high resolution Thin Film Transistor (TFT) active matrix display with advanced driver information including fuel economy performance, outside air temp, clock, odometer and trip, engine hour meter, ignition timer, engine RPM, general truck information, diagnostics, and gear display. All Highline functionality is accessed via the Kenworth MCS providing intuitive control at the drivers fingertips. Also includes Dark Cabin functionality. When activated, the only interior light that will function when a door is opened is the door courtesy lamp.	0	0
8282013	S	Kenworth instrumentation and control package with 9 standard easy-read gauges: includes speedometer, tachometer, fuel gauge, engine coolant temp, engine oil pressure, voltmeter, dual air pressure, air application pressure and DEF gauge. All accessory controls utilize electronically activated solenoids that include advanced vehicle protection interlocks.	0	0
8291002	O	Mute backup alarm w/buzzer in cab.	191	0

Sales Code	Std/ Opt	Description	\$ List	Weight
8300008	S	Interior color: Slate Gray	0	0
8330102	S	Interior package: Vantage daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0	0
8390634	S	Rubber floormat	0	0
8410270	O	Driver Seat: GT702 HB with DuraSupreme material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	236	10
8480106	O	Rider Seat: GT100 Battery/Utility Box HB DuraSupreme Material. The GT100 seats are standard with fixed base. Includes 3-point matching seat belts.	-134	9
8490181	O	Seat Color: Black	0	0
8497005	O	Air line fitting: At driver seat. Customer-installed air chuck.	61	4
8601432	O	Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth	483	0
8601880	O	CB Radio: Cobra 29. Includes weatherband w/header mounted quick release. Includes transceiver & separate speaker remote-mounted in headliner & dual CB antennas. Includes sound tracker & illuminated panel.	565	11
8698982	O	Mid Level Audio System - Daycab: High Performance Door and B-Pillar Speakers.	167	4
8700168	S	Non-self cancelling turn signal: W/column-mounted headlight dimmer switch & intermittent wiper control.	0	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0	0
8700406	O	Stainless steel permit panel on cab, driver side only	107	0
8700663	S	Kenworth TruckTech+ The Kenworth Remote Diagnostics system provides the Worlds Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This option is Standard on all Heavy Duty Kenworths with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine. Optional on Medium Duty Kenworths.	0	0
8800260	O	Long grabhandle RH side mounted to side-of-cab exhaust.	65	2

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0	0
8841618	O	Dual rectangular air horn 23 in. LH & RH top of roof. Includes air horn covers.	242	4
8850139	S	Look-Down, Pass. Door, Black 11x6	0	0
8865003	O	Aero Mirror: Dual Kenworth Chrome Aero. Motorized Heated Mirrors, 7in X 13in With Chrome Mirror Shell and Black Mirror Arms. Also Includes LH/RH Heated 6in X 7in Convex Mirrors. Mirror Brackets Set For 8-1/2 ft Load Width. Mirror Controls Located On Driver Side Door Pad.	350	0
8871446	S	Rear cab stationary window 19in x 36in	0	0
8890038	O	3.5in x 11.5in Plastic Records Holder: Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	63	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0	0
8890135	S	Exterior stainless steel sunvisor.	922	19
8890300	O	Fender close-out: Below headlamp, behind bumper. *NOT available with 3-piece bumper.	216	0
8890348	O	Wheelwell Fender Extension: 4.5 inches	336	0
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0	0
Lights & Instruments				
9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0	0
9022137	S	Marker Lights: Five, rectangular, LED	0	0
9030016	S	Turn Signal Lights: Flush mounted LED mounted at top of fender wheel arc	0	0
9030052	S	LED Stop, Turn, Tail: With Two LED Backup Lights and With An LED License Plate.	0	0
9052008	O	Floodlights: Dual LED Flush 1st Set	193	0
9059921	O	Floodlight Location: Located Low - First Set . This Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Codes Only.	0	0
9080206	O	Switch and Wiring: Cust. Installed Beacon Lights With Additional 20ft Jumper Harness Shipped Loose	237	1
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
9090049	S	Omit Brake Light with Engine Brake. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0	0

Price Level: January 1, 2019

Deal: City of Mukilteo

Printed On: 10/7/2020 11:37:00 AM

Date: October 07, 2020

Quote Number: QUO-631719-W5L2S2

Sales Code	Std/ Opt	Description	\$ List	Weight
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	158	4
9090302	O	Junction Box: Mounted Behind Cab or Sleeper Not Mounted at End of Frame.	161	1
9090316	O	Junction Box: End of Frame	250	1
9090849	O	Polyswitches replacing fuses. Switch will automatically reset after removal of excess load.	48	0
Air Equipment				
9101218	S	Air Dryer: Bendix AD-HF Puraguard Heated	0	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0	0
9110020	O	Full truck kit: Gladhands mounted at end-of-frame. Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	990	15
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0	0
9140085	O	Bendix LQ-5 ratio valve:for Kenworth-installed pusher/tag. LQ-5 valve limits the amount of air applied to the pusher brakes. Helps prevent lockup in lightly loaded conditions.	291	2
9140254	O	Locate air dryer inside RH rail BOC. This code requires the use of a custom frame layout code.	0	0
9140286	O	Air tanks: clear of left side of transmission area. This code requires the use of a custom frame layout code.	0	0
9140328	O	Trailer ABS electric supply through SAE J560 7-pin connector per TMC RP137).	0	0
Extended Warranty				
9200006	O	Base Warranty - PACCAR MX-11 & MX-13 Engine 24 months / 250,000 miles / 400,000 km / 6250 hours.	0	0
9200021	S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0	0
9210159	U	Contract	0	0
9212601	S	24 Month TruckTech+ Subscription for PACCAR MX Engines w/ OTA Functionality	0	0
Miscellaneous				
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0
9490003	O	Additional lead time required for off highway & /or specialty component truck.	0	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	48	4

Sales Code	Std/ Opt	Description	\$ List	Weight
9491665	S	CECU/VECU Electronics Architecture	0	0
Promotions				
Paint				
9700000	O	Paint color number(s).	0	0
		N9702 A - L0347 SOVEREIGN BLUE N9720 FRAME N0001 BLACK		
9943004	O	Bumper Unpainted	0	0
9943052	O	Day Cab Pearl Metallic Paint	300	0
9944820	O	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Order Comments



Total List Price (W/O Freight & Warranty & Surcharges)

\$258,128

Marketing and Service Support Fee

\$740

Prepaid Freight

\$2,475

Total Surcharge/Options Not Subject To Discount

\$0

Total Weight

17,569

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER


While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

Handwritten note:
266,283
w/ PTO

Shipping Destinations**Intermediate Destination:**


Final Destinations	Quantity
--------------------	----------

Dtpo: Truck Model: T880 Customer: City of Mukilteo

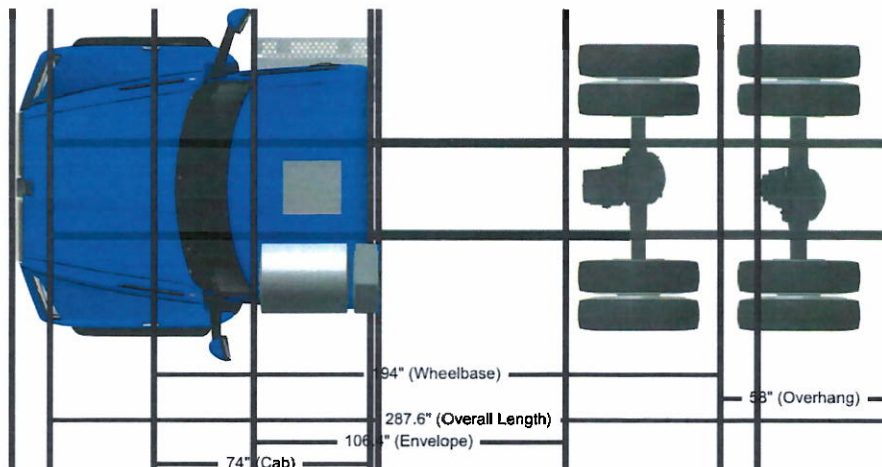


Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured.

Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

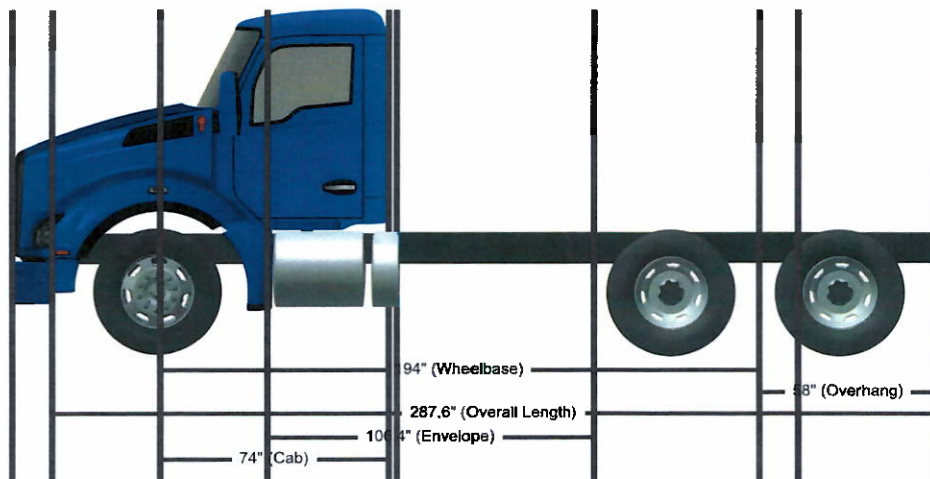

Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured.

Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

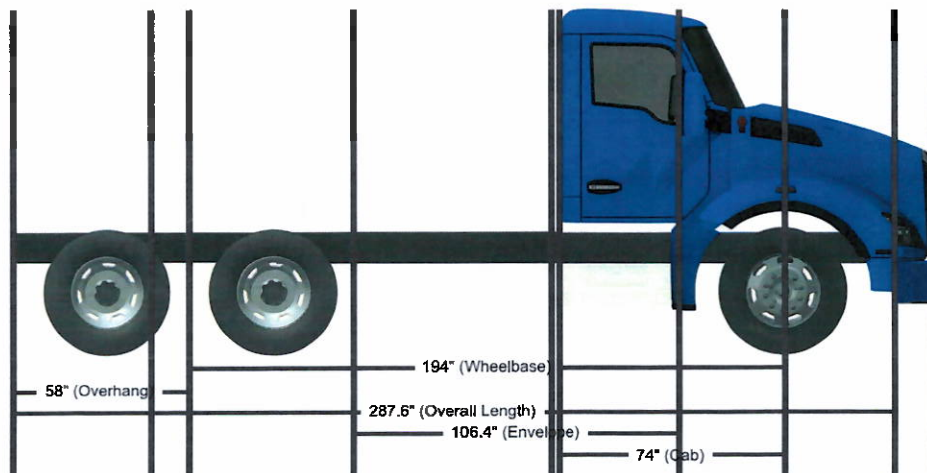

Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured.

Dtpo: Truck Model: T880 Customer: City of Mukilteo

Selected Options

Sales Option	Description	Width	Side
7210060	Fuel Tank: 60 US gallon 24.5in. alum...	24.5	Left
7722011	Small round DEF tank. 11 gallons of	24.5	Left
6405000	In-cab steel battery box: under rider ...	18	Center

Available Space: Left: 63.1 in. Center: 76.4 in. Right: 56.5 in.

10/6/2020, 4:08:02 PM

VEHICLE WEIGHT RATING

FRONT AXLE COMPONENTS

Component	Sales Code	Description	Ratings
Axle	2506181	Dana Spicer D2000 Front Axle rated 20K	20,000
Springs	2866020	Front Springs: Taperleaf 20K w/ shock absorbers	20,000
Power Steering	2893881	Single power steering gear: 16K TRW TAS85	16,000
Hubs, Drums	2701319	Front Hubs Aluminum hub pilot 20,000 lbs.	20,000
Brakes	2607002	Front Brakes: 14,601-22K Bendix air disc brakes.	22,000
Tires	4077406	Front tires: Bridgestone M864 385/65R22.5 18PR	18,740
Wheels	5045218	Front Wheel: Alcoa 82462 22.5x12.25 aluminum,	24,600

Requested Front (Lbs): 16,000
 Minimum: 8,000
 Maximum: 16,000

The front axle weight rating cannot exceed 16000

REAR AXLE COMPONENTS

Component	Sales Code	Description	Ratings
-----------	------------	-------------	---------

REAR AXLE COMPONENTS

Axle	3142171	Dual Meritor RT46-164PEH rear axle rated at 46K	46,000
Hubs, Drums	3407050	Dual Rear Hubs: Aluminum hub pilot 46K	46,000
Service Brakes	3306001	Dual rear Bendix air disc brakes for dual	46,000
Spring Brakes	3485002	Spring brakes included w/ dual rear air disc	52,000
Suspension	3742970	Tandem Hendrickson HAULMAAX (HMX) 460 46K.	46,000
Tires	4278133	Rear tires: Bridgestone L320 11R24.5 16PR.	52,880
Wheels	5245275	Rear Wheel: Alcoa 98U63 24.5X8.25 AL	59,200

Requested Rear (Lbs):	46,000
Minimum:	16,000
Maximum:	46,000

The rear axle weight rating cannot exceed 46000

GROSS COMBINATION WEIGHT RATING


GCWR (lbs)	105,500
Min	62,001
Max	999,000

The Gross Combination Weight Rating rating cannot exceed 999000

WEIGHT DISTRIBUTION

Model: T880

Actual performance of a specific unit can be affected by your operating conditions. The performance calculations should only be used as a guideline.

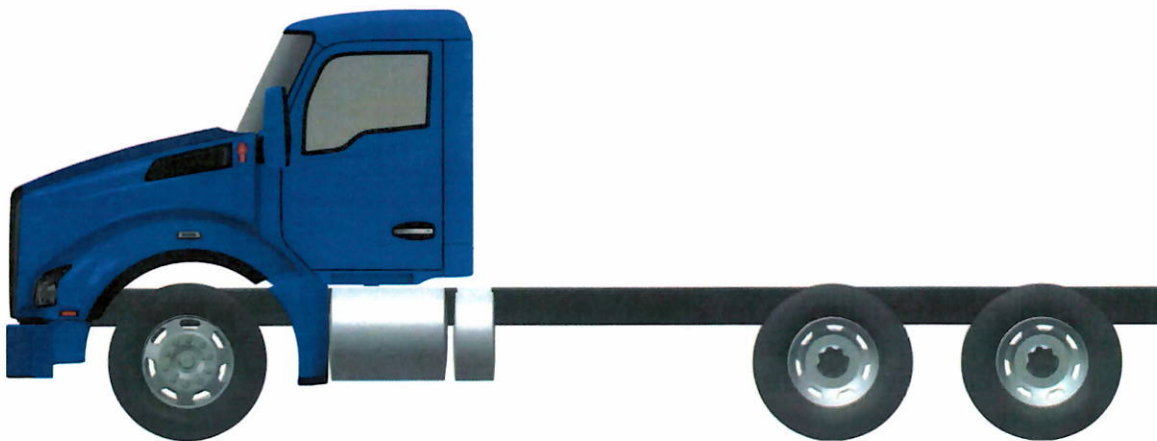

Recommended payload center of gravity to achieve specified ground loads;
measured from centerline of drive axles: 24 in. from the centerline of the drive
axle(s).

Weight (lbs)	Front	Rear	Total
Chassis	9872	7582	17454
Tools/Driver	255	120	375
Fuel & DEF	386	158	543
Max Payload	5487	38141	43628
Auxiliary Payload	0	0	0
Total	16000	46000	62000
Specify Ground Load	16000	46000	

Auxiliary Payload

Item	Location from FA CL	Weight	Point Description
Load Point #1	0	0	
Load Point #2	0	0	
Load Point #3	0	0	
Component(s)	-	0	Composite Totals

Fifth wheel slide length is **0** inches
Selected rearmost setting is **0** inches
Wheelbase measurement: **194** inches
Overhang measurement: **58** inches



Quote# 201006MK
10/07/2020

Price Quotation For

Northend Truck Equipment

20812 Broadway Ave.
Snohomish, WA 98296

Ph: 360-653-6066 Fax: 360-653-0100

1-800-653-6066

Visit Our Web Site - www.northendtruck.com



Prepared For:

Matt Nienhuis

City of Mukilteo

Public Works Superintendent

425-315-2613

mnienhuis@mukilteowa.gov

State of Washington Current Contract Information:

Effective Date: 5/1/2018

Contract number: 01117

Contract title: Dump Bodies, Snow Plows Various

Types, Controls & Service

Excel#	Item #	Category/ Option Description	QTY	Unit Price	Total Price
Category D: Double Dump (Frink) – Truck Mounted					
89	2	Everest, GI-90 combination Dump Body/Spreader, Meets or Exceeds All Specifications in Section I, 1-2, Section II, 1-10, Section III, 1-7, Section IV, 1-5, Section V, 1-3, Section VI, 1-3, Section VII, 1-8, Section VIII, 1-4 and Section IX, 1-2	1	\$51,282.00	\$51,282.00
93	6	Strobes: Whalen L31 per pair Installed	1	\$1,129.80	\$1,129.80
96	9	Wig-Wag Lighting on the Chassis Sub-Frame	1	\$535.50	\$535.50
62	4	Asphalt door (x3)	3	\$749.70	\$2,249.10
64	6	Power Tarp (Needs to be Removed For Front Dumping application)	1	\$5,037.90	\$5,037.90
69	11	Auger in lieu of conveyor **(Option Not Currently Selected)**	0	\$1,881.60	\$0.00
71	13	Asphalt Lip	1	\$813.75	\$813.75
82	24	Aluminum Tool Box 18x18x36, CA Room Permitting	1	\$890.40	\$890.40
98	11	LED Light Mounted In Spinner Area	1	\$241.50	\$241.50
100	13	Upgrade underbody hoist changing mode to wedge in lieu of pin	1	\$994.35	\$994.35
NTE Hydraulics					
5	2	Open Center Snow and Ice System 4 Section Valve With Dual Flow, Manual Electric Sander Valve Control and Stainless Box (Room Permitting) With 50 Gal./Minute Gear Pump Front Mounted With OEM Front Frame Rail Extensions, Air Control Console, Behind The Cab Tank, or VT35 with Poly Or Stainless Lid, With Basic Hoses and Fittings Installed (See Sander Line Option)	1	\$18,787.65	\$18,787.65
61	3	Hot Shift PTO I.L.O. Manual Transmission For Allison	1	\$1,779.75	\$1,779.75
62	4	Pony Package Upgrade (Requires Standard Hydraulic System, Uses Plow Up Circuit) (For Wet Line, Includes Trailer Gate and Reach Controls)	1	\$1,960.35	\$1,960.35
63	5	Cab Guard Combination Oil Tank Complete With All Accessories In Lieu Of Standard Hydraulic Tank	1	\$3,246.60	\$3,246.60



Quote# 201006MK

10/07/2020

Northend Truck Equipment

20812 Broadway Ave.
Snohomish, WA 98296

Ph: 360-653-6066 Fax: 360-653-0100

1-800-653-6066

Visit Our Web Site - www.northendtruck.com

Plow Category 6: Snow Plow Reversible					
22	1	Henke 10' Plow with Parallel Lift Push Frame and Mechanical Float	1	\$12,688.20	\$12,688.20
27	2	Plow shipped to Northend Truck set up and tested with plumbing and Stucchi multi quick disconnect. Ship with completed unit. (Must Pick a Plow Hitch Option)	1	\$1,400.70	\$1,400.70
31	6	Henke Flat Plate Hitch Install on new Truck Build Includes Truck Portion Plate	1	\$3,126.90	\$3,126.90
38	13	Truck-Lite #80990 LED Heated Plow Lights, to be hooked up to Chassis provided wiring and switch , Includes Adjustable Stainless Steel Brackets (Installed)	1	\$1,480.50	\$1,480.50
43	18	Trucks Without Front Frame Rail Extensions (OEM Approved For Snow Plow) (Must Pick Up A Plow Hitch Option) Add	1	\$3,347.40	\$3,347.40
SubTotal					\$110,992.35
Applicable Sales Tax Percentage at Delivery Location				10.40%	\$11,543.20
Total Price with Tax Included					\$122,535.55

Notes:

1. Chassis CA/CT Requirement: 120"
2. Customer to Supply Kenworth T880 with no front frame extensions
3. Chassis Must Come with Stationary Grill, and Prepped for Allison Transmission Mount PTO

*** Chassis Drawing Required With Dump Body Order, For Customers Specific Truck From Chassis Dealer. Must Include CA Measurement, Cab Height, and Drop Axle Location (if applicable). ***

Accepted: *Zack Andrews*

10/7/2020 Accepted: _____ Date: _____

Zack Andrews

NORTHEND TRUCK EQUIPMENT

Matt Nienhuis

City of Mukilteo

PO Number: _____

Thank You for your help on this, if you have any questions or need additional information

Please call or email me at **425-903-2207**, ZackA@northendtruck.com

Sincerely,

NORTHEND TRUCK EQUIPMENT

Zack Andrews

Sales



Quote Number: CityofMukilteo3AxTrl WK UP

Matt Nienhus

Customer: City of Mukilteo
11930 Cyrus Way
Mukilteo, WA 98275

Date: 10/6/2020

Salesperson: Paul Barrett

Cell: (425) 417-6768

Paul@oswequipment.com

Job #**Phone:****Payment Contact:**

E-Mail:

Snohomish County Bid: ITB NUMBER 060-16SR[illegible]

P.O. Box 1651 ~ Woodinville, WA 98072 ~ Office (425) 483-9863 ~ Fax (425) 483-4504



OSW Equipment & Repair, LLC.

OSW 3 AXLE W/1ST AXLE ON TURN TABLE STEEL BOX PONY TRAILER MODEL DS36SA-ST

Trailer Chassis		Initial	
Frame:	1/4" Grade 80 C-Channel Frame & 5/16" Tongue Rails		
Turntable:	26,000 lbs. Capacity; Provides 24 Degrees of Turn Each Way		
Turntable	2 - 30/30 Brake Cans Actuated Rods into Reinforced Holes in Turntable		
Lock System:	Sub-Assembly Holes Only Line Up with Their Respective Rods to Prevent Lock		
	In Any Other Position Except Straight		
Tongue Hinge:	(2) Hinges with Poly Bushings Welded & Gusseted to Both Frame & Tongue Rails		
Tongue:	Air Slide. 3/8" x 8" x 8" Square Tube (STD)		
Tongue Jack:	Top Wind Jack Mounted Roadside on Tongue Rail		
Tongue Eye:	Premier 207L with Poly Bushings		
Hoist:	to Match Body Length		
Rear Hinges:	Heavy Duty 1" Ears & 2" 4140 Pins		
Axles:	(3) - 77.5" Drum 22,500 lbs. (STD)		
ABS:	Haldex 2/S1M Antilock Braking System		
Suspension:	Hutch CH9700 Flange Mount Cast Steel Hangers		
	Front Turn Table Axle: 3 Leaf High Arch Springs		
	Rear Axles: 3 Leaf Low Arch Springs		
Tires:	(6) - 385/65R22.5 Radial		
Wheels:	(6) - 12.25" x 22.5" Non Polished Aluminum Wheels		
Lights	All Lights are LED & Mounted in Rubber Grommets		
Rear Crossmember:	(2) - 4" Lights and (1) License Plate Light in Rear Cross Member.		
	(3) - 2" ICC Cluster Lights Centered Atop the Rear Cross Member.		
Tongue Tube:	(1) - Constant Flashing Light Atop the Tongue Tube		
Add Lights:	NO		
Steps:	(1) - Tongue Rail Step Driver Side		
Flaps:	Mud Flaps Front & Rear of Axles		

Paint:

OSW Black (STD)

15' 6" Steel Trailer Body		Initial	
Floor:	3/16" AR450 Steel (STD)		
Sides:	10GA GR50 Outer & 10GA GR50 Inner Wall (DW)		
Side Height:	39"		
Corrugation:	YES		
Top & Mid Rails:	10 GA GR50 Steel (STD)		
Bulkhead:	3/16" AR450 Steel (STD)		
Corrugation:	YES		
Tarp System:	"LC" Electric Tarp - Pull Tarp Brand		
Mount Location:	High		
Tarp Material:	Asphalt		
Tarp Color:	Black		
Integrated Housing:	N/A		
Housing Location:	Top Mount		
Motor Location:	Left Hand (STD)		
Hi Lift:	NO		
Tailgate:	10GA Inner & 10GA Outer (DW)		
	Horizontal Channels are Formed Into the Outer Wall - Hinged at Top with 1.25" Pins		
	90° - Add a Shed Angle to Top of Tailgate		
Haz Locks:	2 (STD) Cannot Have Tailgate Opener		
Tailgate Opener:	NO		
Tailgate Locks:	2.5" x 6" Air Operated Cylinder		
Longitudinals	3/16" GR50 Steel 6" (STD)		
Corner Posts:	3/16" GR50 Steel (STD)		
Dog House:	3/16" T1 Steel (STD)		
Spreader Chains:	(2) 3/8" HD Chains Welded to Underside of Rear Cross Member. Chains Hook to Slotted Brackets on Tailgate		
Side Boards:	Brackets with 4"x12" Lumber 16'6" Body and Shorter		
Lights:	ICC/DOT Legal Lights Grommet Mounted LED's		
	(2) 2" Red Marker Per Corner Post		
	(2) Stop, Turn, Tail Light Per Side		
	ABS Light is Forward Facing in Driver Side Corner Post		
Marker Lights:	1 Per Side (2 Total STD)		

